
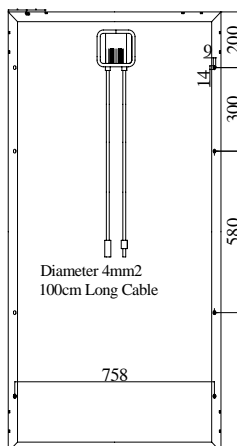


## SL160-24 Multi or Mono Crystalline Solar Module

- low iron tempered glass, EVA laminate and waterproof TPT yield long life modules while enhancing cell performance
- manufactured in ISO 9001, IEC61215 and TUV certified facilities
- 2-year full product warranty
- 20 year limited warranty on power output

Sunlink crystalline solar modules offer industry leading high performance and are designed specifically to meet our clients' demands for residential, commercial and industrial use –from small installations to multi-Megawatt power plants.

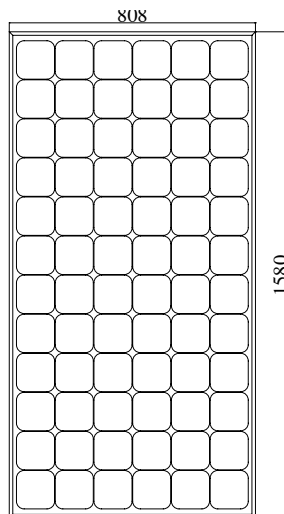

### Technical data under STC

Nominal peak power (Wp)	160	170	175
Nominal voltage (Vmp)	34.2	34.4	34.6
Nominal current (Imp)	4.6	4.9	5.1
Open circuit voltage (Voc)	43.2	43.2	43.2
Short circuit current (Isc)	5.3	5.6	5.8

Minimum power tolerance	+/-5%
Cells per module	72pcs 5" cells
Module size	1580x 808x 35mm
Maximum System Voltage	715V DC
Temperature coefficient Voc	-0.38%/°C
Temperature coefficient Isc	+0.10%/°C
Temperature coefficient Pmax	-0.47%/°C
IEC-61215 certificate	yes
Safety Class II	yes
Operating Temperature	-40/+85°C

**Sunlink PV Co., Ltd**

**Wangxi Industrial zone, Zhangjiagang City, Jiangsu, China 215600, Tel: +86-512-58262253**

**Fax: +86-512-58262258, e-mail :sales@sunlink-pv.cn**